

Overview



SITRANS LR260 is a 2-wire 25 GHz pulse radar level transmitter for continuous monitoring of solids and liquids in storage vessels including extreme levels of dust and high temperatures, to a range of 30 m (98.4 ft).

Benefits

- Graphical local user interface (LUI) makes operation simple with plug-and-play setup using the intuitive Quick Start Wizard
- LUI displays echo profiles for diagnostic support
- 25 GHz high frequency allows for small horn antennas mounted easily in nozzles
- Communication using HART or PROFIBUS PA
- Process Intelligence signal processing for improved measurement reliability and Auto False-Echo Suppression of fixed obstructions
- Programming using infrared Intrinsically Safe handheld programmer or SIMATIC PDM

Application

SITRANS LR260 includes a graphical local user interface (LUI) that improves setup and operation using an intuitive Quick Start Wizard, and echo profile displays for diagnostic support. Startup is easy using the Quick Start wizard with a few parameters required for basic operation.


SITRANS LR260's unique design allows safe and simple programming using the Intrinsically Safe handheld programmer without having to open the instrument's lid.

SITRANS LR260 measures virtually any solids material to a range of 30 m (98.4 ft).


- Key Applications: cement powder, plastic powder/pellets, grain, flour, coal, solids and liquids bulk storage vessels, and other applications.

Configuration


Mounting on a nozzle

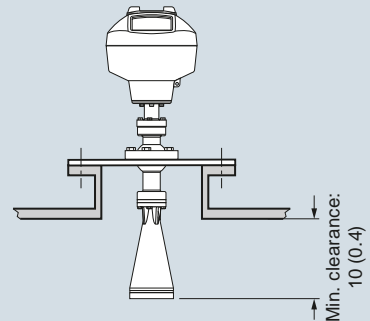

Installation

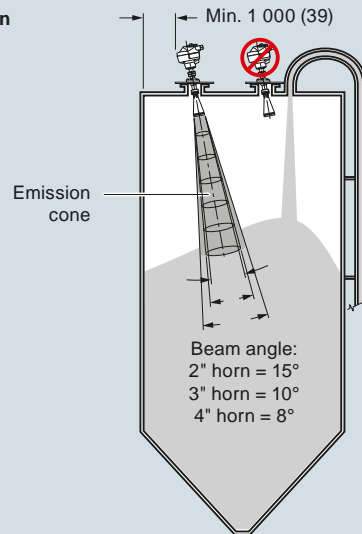

Positioning with easy Aimer

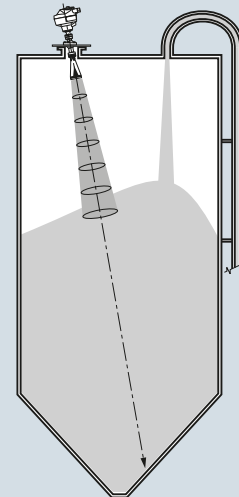

SITRANS LR260 installation, dimensions in mm (inch)

Level measurement

Continuous level measurement – Radar transmitters

SITRANS LR260

Technical specifications

Mode of operation		Design	
Measuring principle	Pulse radar level measurement	Enclosure	
Frequency	K-band (25.0 GHz)	• Construction	Aluminum, polyester powder-coated
Minimum detectable distance	0.05 m (2 inch) from end of horn	• Conduit entry	2 x M20x1.5 or 2 x ½" NPT
Maximum measuring range ¹⁾		Degree of protection	Type 4X/NEMA 4X, Type 6/NEMA 6, IP67, IP68
• Solids	<ul style="list-style-type: none"> • 2" horn: 10 m (32.8 ft) • 3" horn: 20 m (65.6 ft) • 4" horn: 30 m (98.4 ft) 	Weight	< 8.14 kg (17.9 lb) including 4" flange and standard Easy Aimer with 4" horn antenna
• Liquids	<ul style="list-style-type: none"> • 2" horn: 20 m (65.6 ft) • 3" horn: 30 m (98.4 ft) • 4" horn: 30 m (98.4 ft) 	Display (local)	Graphic LCD, with bar graph representing level
Output - HART		Flange and horn (easy aimer model)	
Power	<ul style="list-style-type: none"> • 4 ... 20 mA (± 0.02 mA accuracy) • Nominal 24 V DC (max. 30 V DC) 	• Material	304 stainless steel
Fail signal Load	3.6 mA ... 23 mA; or last value 230 ... 600 Ω	• Horn antenna	2" horn 3" horn 4" horn
Output - PROFIBUS PA		Process connections	
	<ul style="list-style-type: none"> • Per IEC 61158-2 • 15.0 mA • Profile version 3.01, Class B 	• Universal flanges ²⁾	2 inch/50 mm, 3 inch/80 mm, 4 inch/100 mm, 6 inch/150 mm
Performance (according to reference conditions IEC60770-1)		Mechanical (Threaded Connection model)	
Maximum measured error (including hysteresis and non-repeatability)	<ul style="list-style-type: none"> • 25 mm (1 inch) from minimum detectable distance to 300 mm (11.8 inch) • Remainder of range = 10 mm (0.39 inch) or 0.1% of span (whichever is greater) 	• Threaded connection	2" NPT (ASME B1.20.1), R (BSPT, EN 10226-1) or G (BSPP, EN ISO 228-1)
Rated operating conditions		• Materials	316L/1.4404 or 316L/1.4435 stainless steel PTFE emitter
Installation conditions		Certificates and approvals	
• Location	Indoor/outdoor	General	CSA _{US/C} , CE, FM
Ambient conditions (enclosure)		Radio	Europe (R&TTE), FCC, Industry Canada, C-TICK
• Ambient temperature	-40 ... +80 °C (-40 ... +176 °F)	Hazardous	CSA/FM Class II, Div. 1, Groups E, F, G, Class III
• Installation category	I		ATEX II 1D, 1/2D, 2D Ex ta IIIC T100 °C Da
• Pollution degree	4		IECEx/ATEX II 1 GD Ex ia IIC T4 Ga, Ex ta IIIC T100 °C Da
Medium conditions			CSA/FM Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G
Dielectric constant ϵ_r	$\epsilon_r > 1.6$, antenna and application dependent		SABS ARP0108 Ex ia IIC T4 Ga
Process temperature	-40 ... +200 °C (-40 ... +392 °F)	Programming	
Process pressure	<ul style="list-style-type: none"> • 0.5 bar g (7.25 psi g) maximum • 3 bar g (43.5 psi g) optional with 80 °C (176 °F) temperature max 	Intrinsically Safe Siemens handheld programmer	Infrared receiver
		• Approvals for handheld programmer	IS model:
			ATEX II 1GD Ex ia IIC T4 Ga
			Ex iaD 20 T135 °C
			T _a = -20 ... +50 °C
			CSA/FM Class I, II, and III, Div. 1, Groups A, B, C, D, E, F, G, T6 T _a = 50 °C
		Handheld communicator	HART communicator 375
		PC	SIMATIC PDM
		Display (local)	Graphic local user interface including quick start wizard and echo profile displays

¹⁾ From sensor reference point

²⁾ Universal flange mates with EN 1092-1 (PN 16)/ASME B16.5 (150 lb)/JIS 2220 (10K) bolt hole pattern

Level measurement

Continuous level measurement – Radar transmitters

SITRANS LR260

Selection and Ordering data	Article No.	Selection and Ordering data	Order code
SITRANS LR260 2-wire, 25 GHz pulse radar level transmitter for continuous monitoring of solids to a range of 30 m (98.4 ft).	7ML5427- 0 ■ ■ ■ 0 - ■ ■ ■ ■	Further designs Please add "-Z" to Article No. and specify Order code(s).	
Order handheld programmer separately process connection Universal flat faced flange fits ANSI/DIN/JIS flanges, Easy Aimer with integral (Easy Aimer ball)		Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]; Measuring-point number/identification (max. 27 characters); specify in plain text	Y15
2 inch/50 mm	A	Manufacturer's test certificate: M to DIN 55350, Part 18 and to ISO 9000	C11
3 inch/80 mm	B	Inspection Certificate Type 3.1 per EN 10204 ⁴⁾	C12
4 inch/100 mm	C		
6 inch/150 mm	D		
<u>Threaded connection</u>		Operating Instructions for HART/mA device English German Note: The Operating Instructions should be ordered as a separate line item on the order.	Article No.
2" NPT (ASME B1.20.1) (tapered thread) ¹⁾²⁾⁵⁾	E	Multi-language Quick Start manual	7ML1998-5KE31
R 2" [(BSPT), EN 10226-1] (tapered thread) ¹⁾²⁾⁵⁾	F	This device is shipped with the Siemens Milltronics manual DVD containing the ATEX Quick Start and Operating Instructions library.	7ML1998-5KE03
G 2" [(BSPT), EN ISO 228-1] (parallel thread) ¹⁾²⁾⁵⁾	G		A5E32106122
Antenna		Operating Instructions for PROFIBUS PA device English German Note: The Operating Instructions should be ordered as a separate line item on the order.	Article No.
2" Horn antenna, fits 50 mm or 2" nozzles ¹⁾	A	Multi-language Quick Start manual	7ML1998-5KF03
2" Horn antenna with 100 mm extension ¹⁾	B	This device is shipped with the Siemens Milltronics manual DVD containing the ATEX Quick Start and Operating Instructions library.	7ML1998-5KF31
2" Horn antenna with 200 mm extension ¹⁾	C		A5E32114443
2" Horn antenna with 500 mm extension ¹⁾²⁾	D		
2" Horn antenna with 1 000 mm extension ¹⁾²⁾	E		
3" Horn antenna, fits 80 mm or 3" nozzles ³⁾	F		
3" Horn antenna with 100 mm extension ³⁾	G		
3" Horn antenna with 200 mm extension ³⁾	H		
3" Horn antenna with 500 mm extension ²⁾³⁾	J		
3" Horn antenna with 1 000 mm extension ²⁾³⁾	K		
4" Horn antenna, fits 100 mm or 4" nozzles	L		
4" Horn antenna with 100 mm extension	M		
4" Horn antenna with 200 mm extension	N		
4" Horn antenna with 500 mm extension ²⁾	P		
4" Horn antenna with 1 000 mm extension ²⁾	Q		
Purge (self cleaning) connection			
No purge connection	0		
Purge connection	1		
Output/communication			
4 ... 20 mA, HART	0		
PROFIBUS PA	1		
Cable inlet			
2 x M20x1.5	A		
2 x 1/2" NPT	B		
Note: Polymeric cable glands will be provided with M20 devices.			
Approvals			
General purpose, CSA US/IC, FM, Industry Canada, FCC, CE, R&TTE, C-TICK	A		
CSA/FM Class II, Div. I, Groups E, F, G, Class III, Industry Canada, FCC, C-TICK	B		
ATEX II 1D, 1/2D, 2D Ex ta IIC T100 °C Da, CE, R&TTE, C-TICK; INMETRO	C		
Non-incendive, CSA/FM Class I, Div. 2, Groups A, B, C, D, Industry Canada, FCC, C-TICK	D		
Intrinsically safe, IECEx/ATEX II 1 GD Ex ia IIC T4 Ga, Ex ta IIC T100 °C Da, R&TTE, C-TICK	E		
Intrinsically safe, CSA/FM Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G, Industry Canada, FCC, C-TICK	F		
Intrinsically safe, South Africa ARP0108 Ex ia IIC T4 Ga	G		
Pressure rating			
Rating per Pressure/Temperature curves in manual ⁶⁾	0		
0.5 bar g (7.25 psi g) maximum	1		
		One metallic cable gland M20x1.5, rated -40 ... +80 °C (-40 ... +176 °F), HART 7ML1930-1AP One metallic cable gland M20x1.5, rated -40 ... +80 °C (-40 ... +176 °F), PROFIBUS PA 7ML1930-1AQ Handheld programmer, Infrared, Intrinsically Safe 7ML1930-1BK Dust cap, PTFE, for 2 inch/50 mm horn 7ML1930-1DE Dust cap, PTFE, for 3 inch/75 mm horn 7ML1930-1BL Dust cap, PTFE, for 4 inch/100 mm horn 7ML1930-1BM HART modem/RS 232 (for use with a PC and SIMATIC PDM) 7MF4997-1DA HART modem/USB (for use with a PC and SIMATIC PDM) 7MF4997-1DB SITRANS RD100 Remote display - see Chapter 7 SITRANS RD200 Remote display - see Chapter 7 SITRANS RD500 web, datalogging, alarming, ethernet, and modem support for instrumentation - see Chapter 7 7ML5750-1AA00-0 For applicable back up point level switch - see point level section on page 4/9 Note: Products shipped with plastic cable gland, rated to -20 °C. If -40 °C rating required, then metallic cable gland is recommended.	
		1) Maximum measurement range 10 m (32.8 ft) solids or 20m (65.6ft) liquids 2) Available with Purge option 0 only 3) Maximum measurement range 20 m (65.6 ft) solids or 30m (98.4ft) liquids 4) Available with pressure option 0 only 5) Available with Antenna Options A, B, F, G, L, and M only 6) Available with pressure option 0 only	


icenta Controls Ltd

Level measurement

Continuous level measurement – Radar transmitters


SITRANS LR260

Characteristic curves

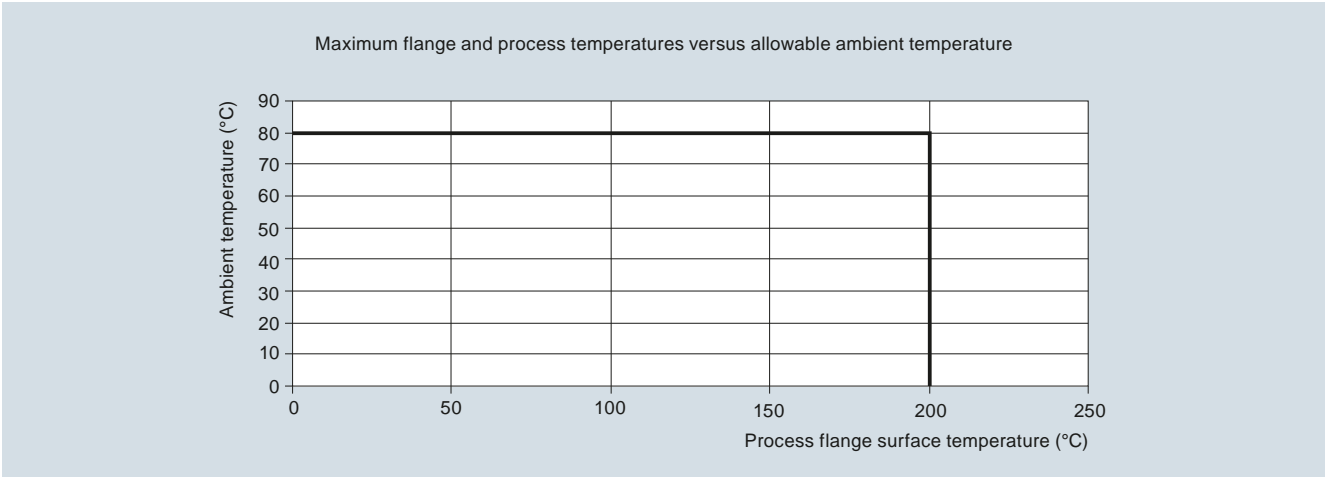

SITRANS LR260 Ambient/Process Flange Surface Temperature Curve

Dimensional drawings

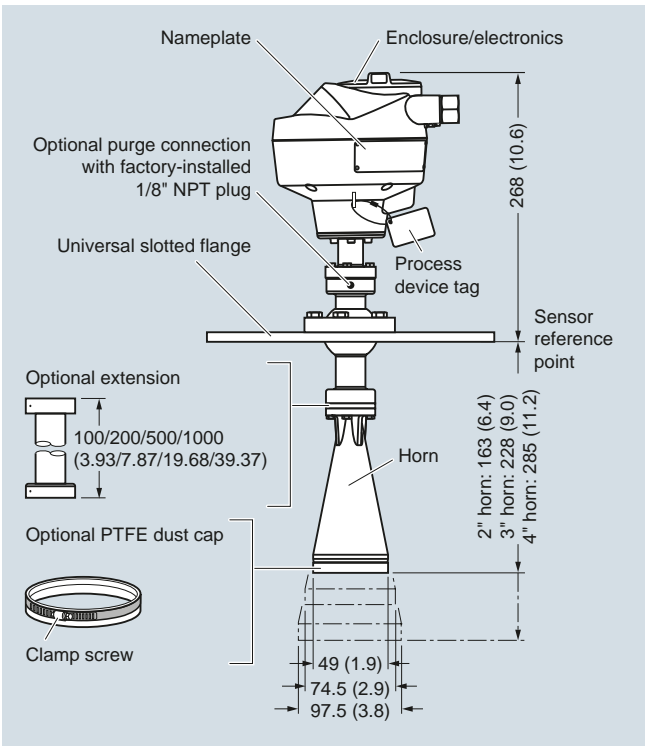


SITRANS LR260, dimensions in mm (inch)

Level measurement Continuous level measurement – Radar transmitters

SITRANS LR260


SITRANS LR260

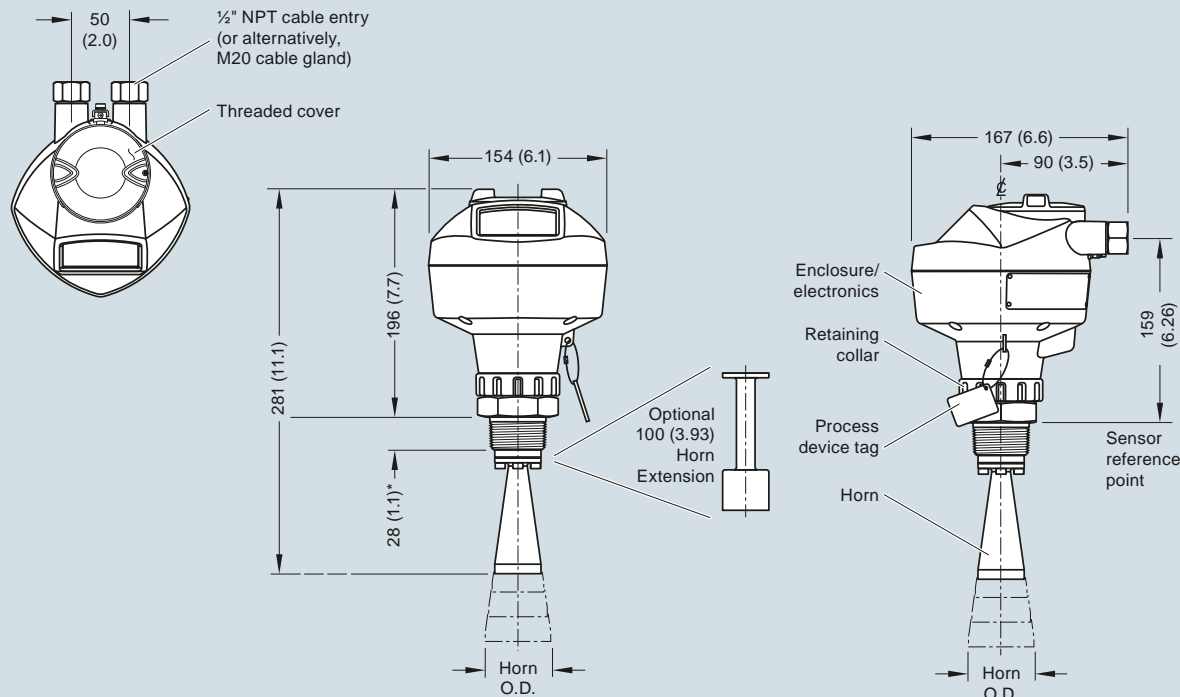

Antenna Type	Antenna O.D.	Height to sensor reference point			Beam angle	Measurement range
		1-1/2" threaded connection	2" threaded connection	3" threaded connection		
2" horn	47.8 (1.88)	N/A	166 (6.55)	180 (7.09)	15 degrees	20 m (65.6 ft)
3" horn	74.8 (2.94)	N/A	199 (7.85)	213 (8.39)	10 degrees	20 m (65.6 ft)
4" horn	94.8 (3.73)	N/A	254 (10)	268 (10.55)	8 degrees	20 m (65.6 ft)

SITRANS LR260, dimensions in mm (inch)

Schematics

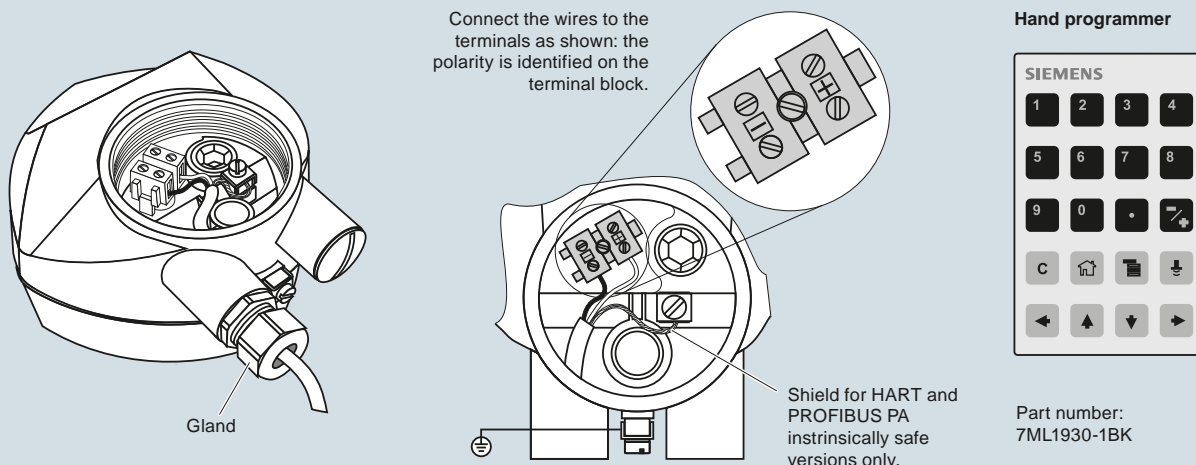

Notes:

1. DC terminal shall be supplied from a source providing electrical isolation between the input and output, to meet the applicable safety requirements of IEC 61010-1.
2. All field wiring must have insulation suitable for rated input voltages.
3. Use shielded twisted pair cable (14 ... 22 AWG) for HART version.
4. Separate cables and conduit may be required to conform to standard instrumentation wiring practices or electrical codes.

SITRANS LR260 connections